

Development and Analysis of a Highly Compact Microstrip Patch Antenna for WiFi 6E Applications

Zainab Yunusa



Abstract: In this research article, a microstrip patch antenna optimized for WiFi 6E applications is presented and analyzed. The antenna, constructed with an FR4 substrate measuring $20 \times 24 \times 1.53 \text{ mm}^3$, adopts a rectangular shape and is designed using CST MWS® software. An equivalent circuit model is formulated and simulated with ADS software to ensure accurate representation. Operating at 6 GHz, simulated results from CST MWS® software indicate a bandwidth of 343 MHz (5.861 GHz to 6.204 GHz), while ADS software suggests 339 MHz (5.848 GHz to 6.187 GHz). In contrast, measured results exhibit a bandwidth of 196 MHz (5.827 GHz to 6.023 GHz). Despite slight discrepancies, satisfactory alignment is observed between computational and experimental outcomes, supported by the equivalent circuit model. Radiation patterns, gain, and efficiency are measured in an anechoic chamber and compared with simulations. E-plane shows directionality, while H-plane demonstrates omnidirectionality, aligning well with simulated patterns. The simulated gain is 5.77 dBi, measured gain is 5.61 dBi, resulting in a simulated efficiency of 93% and a measured efficiency of 88%. The antenna is deemed suitable for cost-effective WiFi 6E applications.

Keywords: Compact Antennas, Large Bandwidth, Patch Antenna, WiFi 6E.

I. INTRODUCTION

The evolution of wireless technology is propelled by an increasing number of devices, connections, and bandwidth-intensive applications. This encompasses various aspects such as the Internet of Things (IoT), critical communication systems, advanced broadband-enabled mobile devices, and numerous other innovations [1][34][35], [2]. The forthcoming networks will need more stable and efficient wireless, and this is where the 6G of Wi-Fi, referred to as Wi-Fi 6E, becomes crucial [3], [4]. The new IEEE 802.11ax protocol is the most recent development in a long history of advancement. Expanding with 802.11ac's advantages, it offers reliability and adaptability allowing old as well as new networks to sustain future technologies. IEEE 802.11ax blends the certainty of licensed cellular (LTE) alongside the flexibility and fast pace of gigabit wireless. With the help of the aforementioned businesses and service providers can improve the level of service for previous applications simultaneously accommodating emerging applications on the identical Wireless LAN (WLAN) architecture [5].

Manuscript received on 08 June 2024 | Revised Manuscript received on 13 June 2024 | Manuscript Accepted on 15 June 2024 | Manuscript published on 30 June 2024.

*Correspondence Author(s)

Zainab Yunusa*, Department of Electrical Engineering, University of Hafr Al Batin, Hafr Al-Batin, Saudi Arabia. Email: zainaby@uhb.edu.sa. ORCID ID: [0000-0002-2843-3145](https://orcid.org/0000-0002-2843-3145)

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](https://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>.

Several Wi-Fi protocols covering the 2.4 GHz and 5 GHz bands are being created over time. The most recent Wi-Fi 6 expansion into the 6.925 – 7.125 GHz range is known as Wi-Fi 6E. The inclusion of the 6 GHz band offers a potential solution to the congestion issues observed in other bands. However, this expansion also introduces challenges in antenna design due to the broad bandwidth involved [6][36]. The Federal Communications Commission (FCC) of the US authorized the unlicensed utilization of the 6-GHz band in the country in April 2020. By making this choice, 1200 MHz of bandwidth became available for use by Wi-Fi 6E devices. Such devices include a further radio that allows them to communicate in the 6-GHz band.

This channel has over two times the capacity compared to the 5-GHz band, which is accessible via Wi-Fi. To encourage cellular new ideas, especially in encouraging intelligent residences, workplaces, and extension activities, the FCC expanded Wi-Fi to include the 6-GHz bands [7], [8]. In the diverse types of antennas available, the microstrip patch antenna stands out as a well-established design for implementing 5G wireless communications. This preference is attributed to its numerous advantages, including its lightweight nature, compact size, cost-effectiveness, low profile, smaller dimensions, and ease of fabrication [9]. Despite these benefits, conventional microstrip antennas are not without their drawbacks, as they often exhibit narrow bandwidth and low gain [10]. In a separate study [11], Loop-type antennas employed compact dimensions and a meandering shape. Alternative studies have delved into configurations like PIFA or monopole antennas specifically designed for Wi-Fi applications [12]–[15]. In [16]–[19], To create a small dimension and thin boundary antenna layout, chip elements were employed. However, adding inductors makes the hardware more complicated and creates issues for the production process.

Each of these techniques has demonstrated its effectiveness in constructing diverse resonant structures aligned with various frequencies. Nevertheless, the uncertainty remains as to whether the current approaches can effectively address the challenge of coverage for the expansive 6 GHz band. When it comes to the Wi-Fi 6E frequency band, the broader high-frequency band poses difficulties in implementation [20], [21].

Similarly, Wi-Fi connection antennas should be omnidirectional to offer broad coverage and convenient connectivity for users. Nevertheless, incorporating additional antennas introduces complexity into device design and necessitates the allocation of extra space. This paper introduces and analyzes highly compact microstrip patch antenna for WiFi 6E applications.



The second step involves the creation of an equivalent circuit model, which is analytically designed and then validated using Keysight ADS software, ensuring its alignment with the desired frequency range. The Wi-Fi 6E band addresses the spectrum shortage challenges faced by current Wi-Fi technology. Additionally, this new technology aims to meet future 5G standards, offering key features such as low latency and high-speed data, while remaining compatible with existing Wi-Fi technology. Leveraging the 6 GHz spectrum, the proposed design provides both high speed and coverage without requiring a complex design, occupying minimal dimensional space, and facilitating easy and cost-effective implementation.

II. ANTENNA DESIGN

The proposed antenna's foundational design relies on the computation approach outlined in [22]. The antenna is suggested to have a rectangular shape, and utilizing CST MWS® software, an examination is conducted on how the dimensions of length, width, and inset feed gaps surrounding the rectangular patch impact the resonant frequency and bandwidth. Parametric analyses are carried out to determine the optimal antenna dimensions, aiming to simultaneously achieve the maximum bandwidth at the desired frequency

A. Configuration and Geometry

During the initial design phase, the suggested antenna is formulated using a conventional patch antenna configuration. It consists of a rectangular patch, and an inset microstrip feed line is utilized on a practical FR-4 substrate. The substrate possesses a height (h) of 1.53 mm, a dielectric constant (ϵ_r) of 4.3, and a loss tangent ($\tan \delta$) of 0.025. The procedures listed next serve to establish the size for the patch, which relies upon the transmission line model that is demonstrated in [22]. The antenna's size and structure are displayed in Fig. 1.

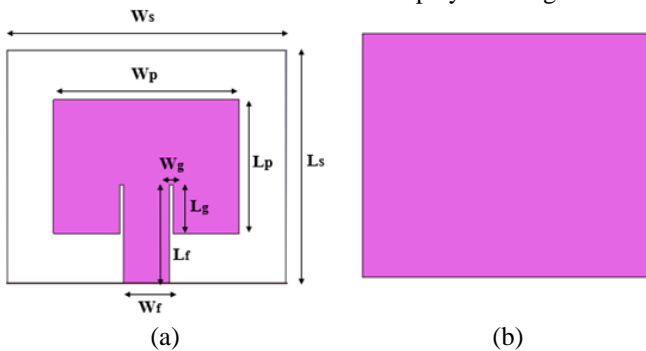


Fig. 1. Antenna Configuration and Geometry: (a) top view (b) Bottom view. The Dimensions of the Antenna are: $L_s = 20$ mm, $W_s = 24$ mm, $W_p = 16$ mm, $L_p = 11.5$ mm, $W_f = 4$ mm, $L_f = 8.5$ mm, $W_g = 0.3$ mm, $L_g = 4.3$ mm.

B. Parametric Study

The antennas' size affects their performance, thus it is important to give them significant thought. In order to solve this, the ideal feed length and width (L_f and W_f) were determined by parametric research as depicted in Fig. 2. In Fig. 2(a), the simulated S_{11} is presented with L_f ranging from 5.0 mm to 9.0 mm, revealing that an optimal S_{11} is attained with an L_f of 8.5 mm, as indicated by the parametric study. Conversely, Fig. 2(b) displays the simulated S_{11} with W_f varying from 1.0 mm to 5.0 mm, and through parametric

analysis, it was determined that a W_f of 4.0 mm results in the most favorable S_{11} . Additionally, the inset feed size (L_g and W_g) has an impact on the antenna's resonant frequency. Consequently, a separate investigation was undertaken as illustrated in Fig. 3. In Fig. 3(a), the simulated S_{11} is presented with variations in W_g , ranging from 0.7 mm to 0.3 mm, revealing that an optimal S_{11} is achieved with a W_g of 0.3 mm, as indicated by the parametric study. Conversely, Fig. 3(b) depicts the simulated S_{11} with varying L_g values from 2.0 mm to 4.3 mm. Following a parametric analysis, it was determined that L_g of 4.3 mm yields the most advantageous S_{11} .

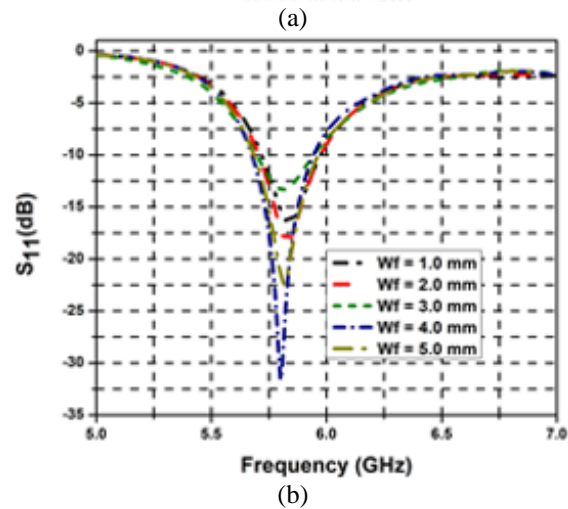
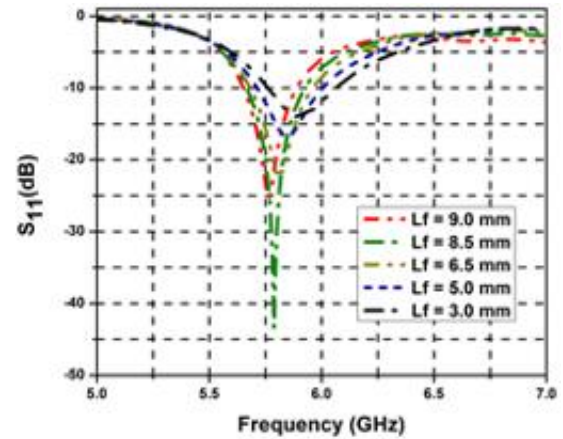
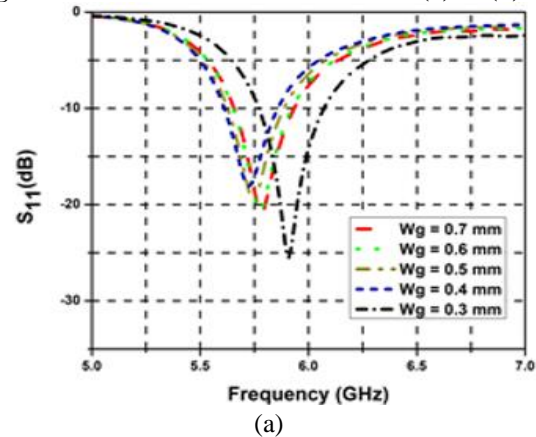


Fig. 2. S_{11} Simulation with Variation in (a) L_f (b) W_f .



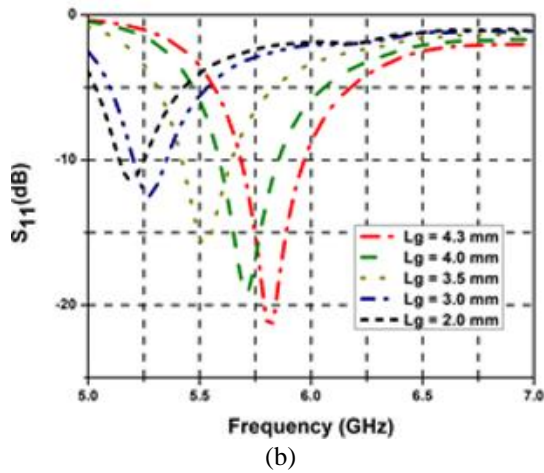


Fig. 3. S_{11} Simulation with Variation in (a) L_g (b) W_g .

C. Equivalent Circuit Model

The equivalent circuit model serves as an initial estimation tool for crucial parameters such as resonance frequency, bandwidth, and impedance matching, guiding the design process before more detailed simulations or measurements [23]. To accurately model the antenna, it is imperative to determine the correct value for each element. Therefore, in this research, a circuit model of the suggested antenna is created and simulated using ADS software. An extensive circuit model is used, which includes modeling for different parts of the antenna. The patch antenna is similar to an open-ended transmission line in general [24]. The patch, line feed, and gap equivalent circuits are also known as discontinuities. Having small capacitances and inductances results from these discontinuities. When applied to the frequency range of the antenna, the values of capacitance (C), inductance (L), and resistance (R) are obtained from equations in [25], [26]. Fig. 4 depicts the total equivalent circuits of the suggested antenna.

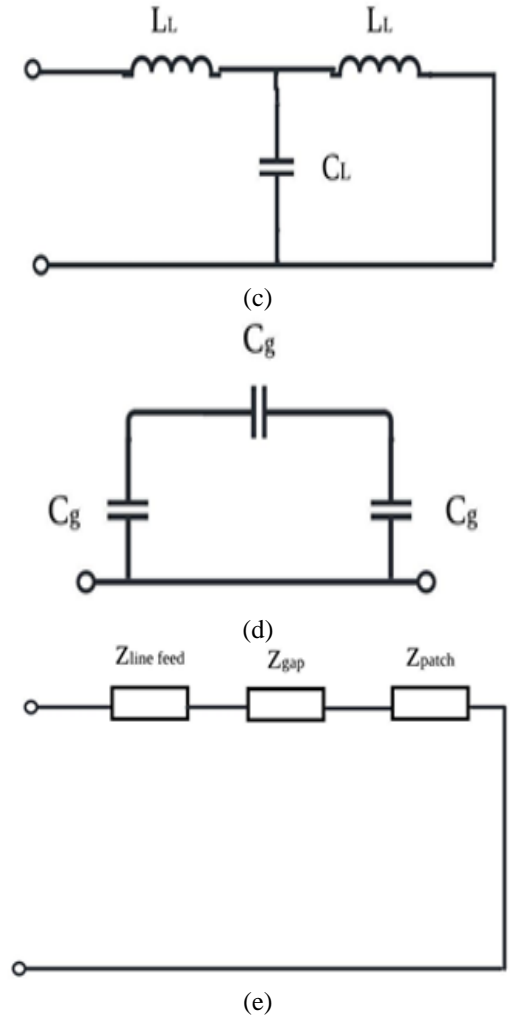
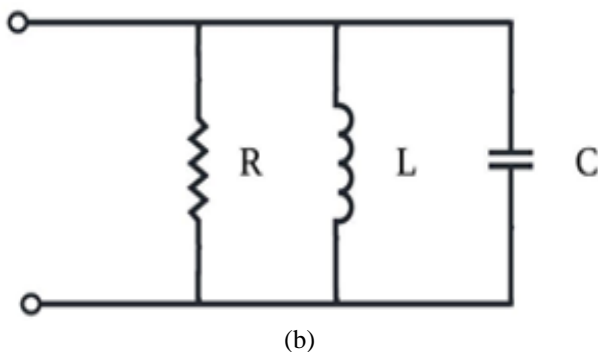
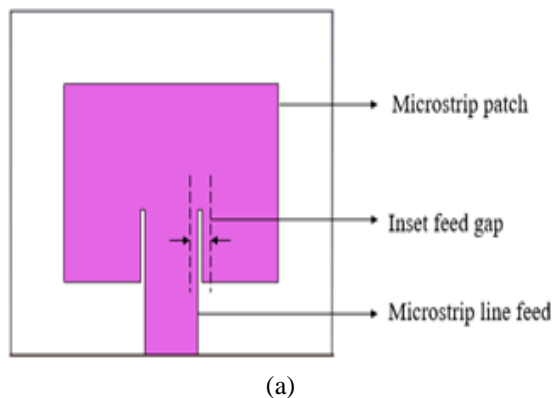


Fig. 4. Proposed Antenna and its Equivalent Circuits: (a) Front View (b) Patch Model (c) Feed Line Model (d) Inset Feed Gap Model (e) Overall Circuit Model. The Equivalent Circuit Values Are: $R = 98 \Omega$, $L = 0.8 \text{ nH}$, $C = 7.9 \text{ pF}$, $L_L = 0.5 \text{ nH}$, $C_L = 0.3 \text{ pF}$, $C_g = 0.15 \text{ pF}$.

III. RESULTS AND DISCUSSION

The proposed design was validated using a fabrication as depicted in Fig. 5(a), with a 50- Ω SMA connector facilitating the connection. The antenna's performance was measured using Keysight's Vector Network Analyzer (VNA) PNA-L, as shown in Fig. 5(b). Simulation and measurement techniques were employed for S_{11} analysis. The results, depicted in Fig. 5(c), reveal a slight frequency deviation in the measured outcomes, attributed to fabrication defects and measurement variations. The simulated results obtained using CST MWS software indicate a bandwidth of 343 MHz spanning from 5.861 GHz to 6.204 GHz, while ADS software suggests 339 MHz from 5.848 GHz to 6.187 GHz.

In contrast, the measured results show a bandwidth of 196 MHz, ranging from 5.827 GHz to 6.023 GHz. Despite these slight discrepancies, there is a satisfactory alignment between the computational results and the results obtained from both simulation and measurement.



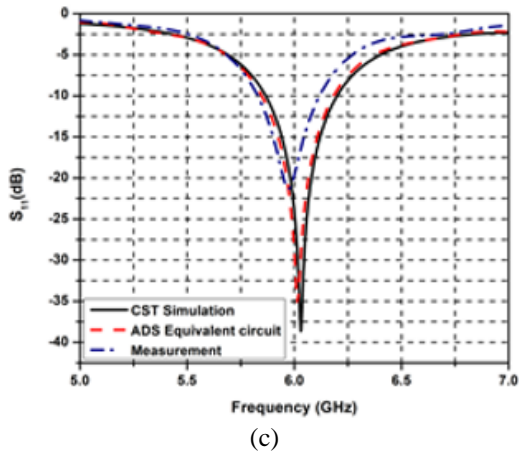
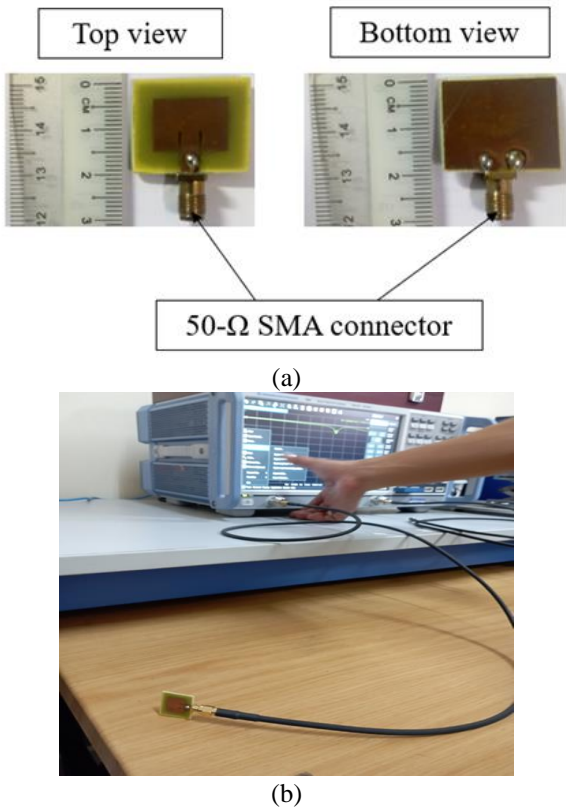


Fig. 5. Proposed Antenna (a) Prototype (b) S_{11} Measurement Setup (c) S_{11} Comparison

The proposed antenna's radiation patterns, gain, and efficiency undergo measurement and are then compared with simulated results. In Fig. 6, a comparison is presented between the simulated and measured radiation patterns. As anticipated, at 6 GHz, the measured radiation patterns exhibit directionality in the E -plane as seen in Fig. 6(a) and omnidirectionality in the H -plane as seen in Fig. 6(b), aligning well with the simulated patterns. Conversely, the simulated gain is 5.77 dBi, while the measured gain is 5.61 dBi, resulting in a simulated efficiency of 93% and a measured efficiency of 88%, as depicted in Fig. 7(a). Additionally, Fig. 7(b) displays 3D far-field radiation patterns for the relevant frequency band, providing further confirmation of the maximum gain achieved by the antenna.

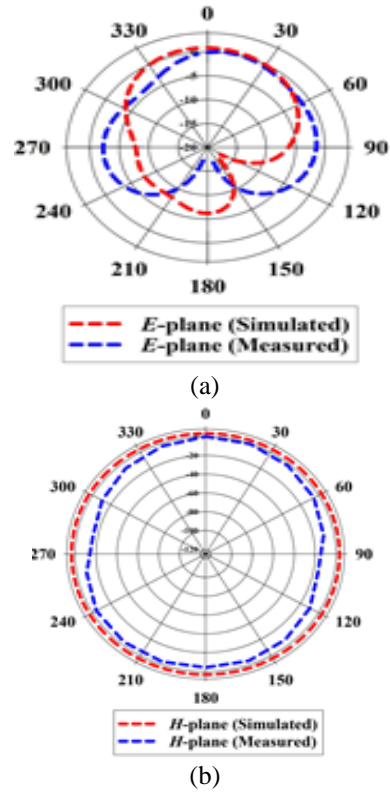


Fig. 6. Radiation Patterns (a) E -plane (b) H -plane

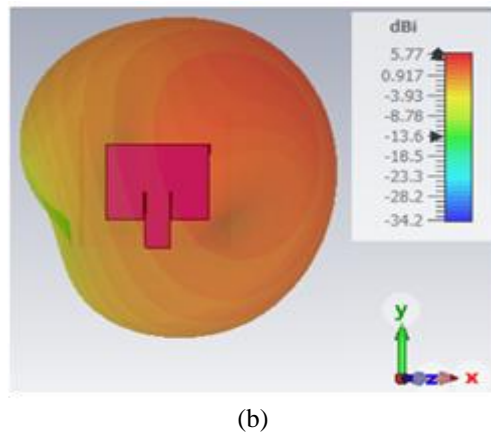
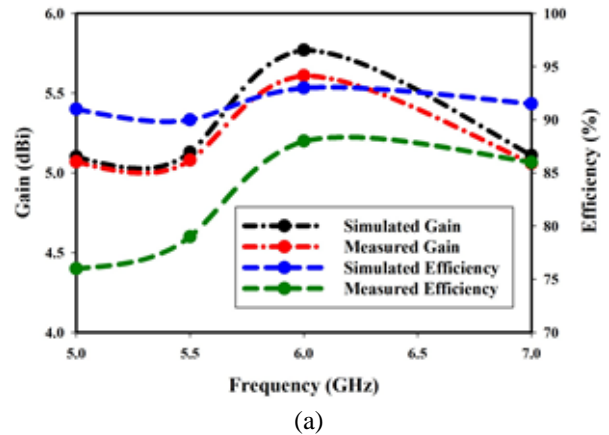


Fig. 7. Proposed Antenna (a) Gain and Efficiency (b) 3D Radiation Pattern

Table I provides a comparative assessment between the antenna proposed in this study and those discussed in earlier research. The results reveal that the recommended antenna features considerably reduced dimensions compared to antennas employed in previous studies. Furthermore, the antenna exhibits excellent results at the frequency that

resonates for impedance bandwidth, gain, and efficiency. The table clearly shows that there are several benefits that the suggested antenna has over antennas that were used in the past.

Table- I: Comparative Analysis of the Performance of the Antenna with Antennas Employed in Prior Studies

Reference	Size (mm ²)	Frequency (GHz)	Material	Bandwidth (MHz)	Gain (dBi)	Efficiency(%)
[10]	36× 37	6	FR-4	220	0.54	59
[27]	52.92 × 55.56	5.65	Arlon	135	7.15	NA
[28]	20× 30	5.55	FR-4	2400	2.69	68.4
[29]	45× 50	4.9	F4B	480	5.12	77
[30]	77× 70.11	4.97	Rogers	NA	4.57	80
[31]	50× 50	6	FR-4	900	5.3	85
[32]	66× 30.8	5	Rogers	NA	7.7	89
[33]	19× 13.4	6	Rogers	180	5.3	NA
This work	20× 24	6	FR-4	343	5.77	93

IV. CONCLUSION

This research article introduces a highly compact patch antenna designed and analyzed specifically for WiFi 6E applications. The antenna, constructed using FR4 substrate material, features compact dimensions of 20 × 24 × 1.53 mm³ and adopts a rectangular shape with the assistance of CST MWS® software. To ensure accurate modeling, an equivalent circuit model was formulated and simulated using ADS software. The antenna operates at a frequency of 6 GHz. Simulated results obtained through CST MWS® software reveal a bandwidth of 343 MHz (5.861 GHz to 6.204 GHz), while ADS software suggests 339 MHz (5.848 GHz to 6.187 GHz). In contrast, measured results exhibit a bandwidth of 196 MHz (5.827 GHz to 6.023 GHz). Although there are slight differences, there is a satisfactory correlation between simulation and measurement. The research further measured the radiation patterns, gain, and efficiency and compared them with simulated results. The measured radiation patterns closely match the simulated ones, displaying directional patterns in the E-plane and omnidirectional patterns in the H-plane. The simulated gain is 5.77 dBi, measured at 5.61 dBi, resulting in simulated efficiency of 93% and measured efficiency of 88%. Consequently, the research concludes that the proposed antenna is suitable for cost-effective WiFi 6E applications.

DECLARATION STATEMENT

Funding	No, I did not receive.
Conflicts of Interest	No conflicts of interest to the best of our knowledge.
Ethical Approval and Consent to Participate	No, the article does not require ethical approval and consent to participate with evidence.
Availability of Data and Material	Not relevant.
Authors Contributions	I am only the sole author of the article.

REFERENCES

- H. Brunner, M. Stocker, M. Schuh, M. Schuß, C. A. Boano, and K. Römer, "Understanding and Mitigating the Impact of Wi-Fi 6E Interference on Ultra-Wideband Communications and Ranging," in *2022 21st ACM/IEEE International Conference on Information Processing in Sensor Networks (IPSN)*, 2022, pp. 92–104, doi: 10.1109/IPSN54338.2022.00015. <https://doi.org/10.1109/IPSN54338.2022.00015>
- M. Z. Asghar, S. A. Memon, and J. Hämäläinen, "Evolution of Wireless Communication to 6G: Potential Applications and Research Directions,"

Sustainability, vol. 14, no. 10, 2022, doi: 10.3390/su14106356. <https://doi.org/10.3390/su14106356>

- A. A. Elijah and M. Mokayef, "Miniature microstrip antenna for IoT application," *Mater. Today Proc.*, vol. 29, pp. 43–47, 2020, doi: <https://doi.org/10.1016/j.matpr.2020.05.678>. <https://doi.org/10.1016/j.matpr.2020.05.678>
- S. Tozlu, M. Senel, W. Mao, and A. Keshavarzian, "Wi-Fi Enabled Sensors for Internet of Things: A Practical Approach," *IEEE Commun. Mag. - IEEE Commun. Mag.*, vol. 50, pp. 134–143, 2012, doi: 10.1109/MCOM.2012.6211498. <https://doi.org/10.1109/MCOM.2012.6211498>
- Cisco, "IEEE 802.11ax : The Sixth Generation of Wi-Fi," *Cisco.com*, pp. 1–16, 2020.
- X. Zhang, L. Sun, Y. Li, and Z. Zhang, "A Broadband Dual-Antenna Pair Based on Half-Open Cavity With Horizontally Polarized Radiation for Wi-Fi 6/6E Application," *IEEE Trans. Antennas Propag.*, vol. 70, no. 6, pp. 4250–4258, 2022, doi: 10.1109/TAP.2022.3140322. <https://doi.org/10.1109/TAP.2022.3140322>
- C.-C. Ku, M.-T. Wu, and M.-L. Chuang, "Multiband Antenna Design for Wi-Fi 6E Applications," in *2022 IEEE International Conference on Consumer Electronics - Taiwan*, 2022, pp. 383–384, doi: 10.1109/ICCE-Taiwan55306.2022.9869129. <https://doi.org/10.1109/ICCE-Taiwan55306.2022.9869129>
- S.-W. Su, P.-H. Juan, and F.-S. Chang, "Conjoined, Two-Monopole Antenna Pair with Decoupling Inductor for Wi-Fi 6E Notebook Applications," *Int. J. Antennas Propag.*, vol. 2022, p. 4553924, 2022, doi: 10.1155/2022/4553924. <https://doi.org/10.1155/2022/4553924>
- U. Musa et al., "Design and Analysis of a Compact Dual-Band Wearable Antenna for WBAN Applications," *IEEE Access*, vol. 11, pp. 30996–31009, 2023, doi: 10.1109/ACCESS.2023.3262298. <https://doi.org/10.1109/ACCESS.2023.3262298>
- S. K. Noor et al., "A Patch Antenna with Enhanced Gain and Bandwidth for Sub-6 GHz and Sub-7 GHz 5G Wireless Applications," *Electronics*, vol. 12, no. 12, 2023, doi: 10.3390/electronics12122555. <https://doi.org/10.3390/electronics12122555>
- W.-S. Chen, C.-M. Cheng, D.-H. Lee, C.-L. Ciou, W.-S. Sin, and G.-Y. Cai, "Small-Size Meandered Loop Antenna for WLAN Dongle Devices," *Int. J. Antennas Propag.*, vol. 2014, p. 897654, 2014, doi: 10.1155/2014/897654. <https://doi.org/10.1155/2014/897654>
- S.-W. Su, C.-T. Lee, and S.-C. Chen, "Very-Low-Profile, Triband, Two-Antenna System for WLAN Notebook Computers," *IEEE Antennas Wirel. Propag. Lett.*, vol. 17, no. 9, pp. 1626–1629, 2018, doi: 10.1109/LAWP.2018.2858849. <https://doi.org/10.1109/LAWP.2018.2858849>
- C.-Y.-D. Sim, C.-C. Chen, X. Y. Zhang, Y.-L. Lee, and C.-Y. Chiang, "Very Small-Size Uniplanar Printed Monopole Antenna for Dual-Band WLAN Laptop Computer Applications," *IEEE Trans. Antennas Propag.*, vol. 65, no. 6, pp. 2916–2922, 2017, doi: 10.1109/TAP.2017.2695528. <https://doi.org/10.1109/TAP.2017.2695528>
- C.-C. Wan and S.-W. Su, "Compact, self-isolated 2.4/5-GHz WLAN antenna for notebook computer applications," *Prog. Electromagn. Res. M*, vol. 83, pp. 1–8, 2019, doi: 10.2528/PIERM19042103. <https://doi.org/10.2528/PIERM19042103>



15. J. Kulkarni, R. Seenivasan, V. Abhaikumar, and D. R. P. Subburaj, "Design of a Novel Triple Band Monopole Antenna for WLAN/WiMAX MIMO Applications in the Laptop Computer," *Int. J. Antennas Propag.*, vol. 2019, p. 7508705, 2019, doi: 10.1155/2019/7508705. <https://doi.org/10.1155/2019/7508705>
16. S.-W. Su and B.-C. Tseng, "Small-sized, printed 2.4/5-GHz WLAN notebook antenna aimed for 4x4 multiple transmit/receive antennas in future Gbps communications," in *2018 IEEE International Symposium on Electromagnetic Compatibility and 2018 IEEE Asia-Pacific Symposium on Electromagnetic Compatibility (EMC/APEMC)*, 2018, pp. 1084–1088, doi: 10.1109/IEMC.2018.8393954. <https://doi.org/10.1109/IEMC.2018.8393954>
17. S.-W. Su, C.-T. Lee, and S.-C. Chen, "Compact, Printed, Tri-Band Loop Antenna With Capacitively-Driven Feed and End-Loaded Inductor for Notebook Computer Applications," *IEEE Access*, vol. 6, pp. 6692–6699, 2018, doi: 10.1109/ACCESS.2018.2794606. <https://doi.org/10.1109/ACCESS.2018.2794606>
18. S.-W. Su, "Very-low-profile, 2.4/5-GHz WLAN monopole antenna for large screen-to-body-ratio notebook computers," *Microw. Opt. Technol. Lett.*, vol. 60, no. 5, pp. 1313–1318, 2018, doi: <https://doi.org/10.1002/mop.31156>
19. S.-W. Su, "Very-low-profile, small-sized, printed monopole antenna for WLAN notebook computer applications," *Prog. Electromagn. Res. Lett.*, vol. 82, pp. 51–57, 2019, doi: 10.2528/PIERL18121403. <https://doi.org/10.2528/PIERL18121403>
20. J. Deng, S. Hou, L. Zhao, and L. Guo, "Wideband-to-Narrowband Tunable Monopole Antenna With Integrated Bandpass Filters for UWB/WLAN Applications," *IEEE Antennas Wirel. Propag. Lett.*, vol. 16, pp. 2734–2737, 2017, doi: 10.1109/LAWP.2017.2743258. <https://doi.org/10.1109/LAWP.2017.2743258>
21. D. Zhao, C. Yang, M. Zhu, and Z. Chen, "Design of WLAN/LTE/UWB Antenna with Improved Pattern Uniformity Using Ground-Cooperative Radiating Structure," *IEEE Trans. Antennas Propag.*, vol. 64, no. 1, pp. 271–276, 2016, doi: 10.1109/TAP.2015.2498939. <https://doi.org/10.1109/TAP.2015.2498939>
22. F. Hirtenfelder, "Effective antenna Simulations using CST MICROWAVE STUDIO (R)," 2007, p. 239, doi: 10.1109/INICA.2007.4353972. <https://doi.org/10.1109/INICA.2007.4353972>
23. U. Musa et al., "Wearable Dual-Band Frequency Reconfigurable Patch Antenna for WBAN Applications," *Prog. Electromagn. Res. M*, vol. 120, pp. 95–111, 2023.
24. M. S. Yahya et al., "Triple-Band Reconfigurable Monopole Antenna for Long-Range IoT Applications," *Sensors*, vol. 23, no. 12, 2023, doi: 10.3390/s23125359. <https://doi.org/10.3390/s23125359>
25. A. Roy, S. Bhunia, D. Sarkar, P. Sarkar, and S. Chowdhury, "Compact multi frequency strip loaded microstrip patch antenna with spur-lines," *Int. J. Microw. Wirel. Technol.*, vol. 9, pp. 1–11, 2016, doi: 10.1017/S1759078716001136. <https://doi.org/10.1017/S1759078716001136>
26. M. Aneesh, J. A. Ansari, and A. Singh, "Analysis of S-shape Microstrip Patch Antenna for Bluetooth application," *Int. J. Sci. Res. Publ.*, 2013.
27. B. Tütüncü and M. Kösem, "Substrate Analysis on the Design of Wide-Band Antenna for Sub-6 GHz 5G Communication," *Wirel. Pers. Commun.*, vol. 125, 2022, doi: 10.1007/s11277-022-09619-9. <https://doi.org/10.1007/s11277-022-09619-9>
28. R. Azim et al., "A multi-slotted antenna for LTE/5G Sub-6 GHz wireless communication applications," *Int. J. Microw. Wirel. Technol.*, vol. 13, 2020, doi: 10.1017/S1759078720001336. <https://doi.org/10.1017/S1759078720001336>
29. Y. Li, Z. Zhao, Z. Tang, and Y.-Z. Yin, "A low-profile, dual-band filtering antenna with high selectivity for 5G sub-6 GHz applications," *Microw. Opt. Technol. Lett.*, vol. 61, 2019, doi: 10.1002/mop.31891. <https://doi.org/10.1002/mop.31891>
30. M. Abo Sree, M. Elazeem, and W. Swelam, "Dual Band Patch Antenna Based on Letter Slotted DGS for 5G Sub-6GHz Application," *J. Phys. Conf. Ser.*, vol. 2128, p. 12008, 2021, doi: 10.1088/1742-6596/2128/1/012008. <https://doi.org/10.1088/1742-6596/2128/1/012008>
31. R. Chowdhury and R. K. Chaudhary, "Investigation on Different Forms of Circular Sectorized-Dielectric Resonator Antenna for Improvement in Circular Polarization Performance," *IEEE Trans. Antennas Propag.*, vol. 66, no. 10, pp. 5596–5601, 2018, doi: 10.1109/TAP.2018.2854418. <https://doi.org/10.1109/TAP.2018.2854418>
32. W.-J. Sun, W.-W. Yang, L. Guo, W. Qin, and J.-X. Chen, "A Circularly Polarized Dielectric Resonator Antenna and Its Reconfigurable Design," *IEEE Antennas Wirel. Propag. Lett.*, vol. 19, no. 7, pp. 1088–1092, 2020, doi: 10.1109/LAWP.2020.2989156. <https://doi.org/10.1109/LAWP.2020.2989156>
33. K. X. Wang and H. Wong, "A Circularly Polarized Antenna by Using Rotated-Stair Dielectric Resonator," *IEEE Antennas Wirel. Propag. Lett.*, vol. 14, pp. 787–790, 2015, doi: 10.1109/LAWP.2014.2385475. <https://doi.org/10.1109/LAWP.2014.2385475>
34. Malviya, Dr. L., Chawla, Prof. M. P. S., & Verma, Prof. A. (2021). Present to Future Antennas for Wireless Communication. In *International Journal of Innovative Science and Modern Engineering* (Vol. 7, Issue 1, pp. 1–8). <https://doi.org/10.35940/ijisme.a1278.027121>
35. Abidin, S., Izhar, M., & Vadi, V. R. (2020). 5th Generation Wireless Communication Revolution. In *International Journal of Recent Technology and Engineering (IJRTE)* (Vol. 8, Issue 5, pp. 1505–1508). <https://doi.org/10.35940/ijrte.e4830.018520>
36. Nitin, N., Ansari, J. A., Agrawal, N., Tiwari, D., & Saroj, A. K. (2019). Deca Band Inset Fed Cross Slot Loaded Patch Antenna for LTE Applications. In *International Journal of Innovative Technology and Exploring Engineering* (Vol. 8, Issue 10, pp. 4619–4628). <https://doi.org/10.35940/ijitee.j9884.0881019>

AUTHOR PROFILE



Zainab Yunusa (MIEEE) received her bachelor's degree in Electrical Engineering from Bayero University Kano, Nigeria in the year 2003, and M. Eng. in Electrical Engineering in the year 2010 from Bayero University Kano, Nigeria. She then received her Ph.D. in sensor technology engineering from Universiti Putra Malaysia in 2015. She has published many local and international journals and conference proceedings on the design and development of R.F and microwave sensors, nanomaterials for electronic applications and the development of microstrip patch antennas for certain applications. She is currently a Senior lecturer in the Department of Electrical engineering at Bayero University Kano and an Assistant professor in the Department of Electrical Engineering University of Hafr Al Batin, Kingdom of Saudi Arabia. She is a corporate member of the Nigerian Society of Engineers and a member of the Council for the Regulation of Engineering of Nigeria since 2011. Her main interests include R.F and microwave devices and applications, nanomaterials for electronic applications, gas sensors, antenna design and applications.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of the Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP)/ journal and/or the editor(s). The Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP) and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.

